



# FD30S - THE FIRE DOOR WITH THE SOLID CORE

The SOLID CORE is made from Sixteen layers of Laminated Veneered Timber



#### The FD30S Fire Door Collection















Normanton 1







Normanton 2

Rufford Solid

Carburton Solid



Maple Solid



Abbey Solid



# **GU Security Automatic - Fire Door Lock**

This is a Slam Shut Lock. The spindle is situated at 960 from the bottom of the slab. Lock comes with fully adjustable composite keeps with edge protection.

With 3 deadbolts and centre latch this is a PAS23/24 tested lock. This is our only lock used on FD30S doors in conjunction with our fire testing certificate.



### **ULTION FD30S Cylinder ULTION Thumbturn**

3 Star Security Cylinder with Secured By Design accreditation and Sold Secure Diamond Standard.



#### **Standard Colours**

Supplied with White Chamfered or Sculptured outer frame only

outer man	ic of ity							
White RAL 9016 Duck Egg Blue		Sliver Grey RAL 7001	ey Grey					
Chartwell Green	Green RAL 6009	Red RAL 3011	Blue RAL 5011					
Irish Oak	Golden Oak RAL 8001	Black Cherry	Black Brown RAL 8022	Black RAL 9011				

## FD30S - The Fire door with the solid core made from sixteen layers of Laminated Veneered Timber.

- ✓ FD30S Fire Doors
- ✓ Certified Registered CF705
- ✓ EN14449:2005-EN1279-5 Compliant Sealed Units
- ✓ Tested to BS476 Part 22 1987 Both Sides Report numbers 402105 & 403720
- ✓ BSEN 1154 Compliant Closers

### **Glass Options**







7mm Pyrodur with 6.8mm Stippolyte



7mm Pyrodur with 6.8mm Satin

#### **Standard Fit Fully controlled** door closer.



Easy speed adjustment makes this ultra efficient.

#### **Optional ASSA External** fitted closer.

Rack and pinion closer with link arm.



#### **Union Powerload Butt Hinge**


High Performance bushed bearing butt hinge.

Radius corners for speed of fixing.



Security

# **Hardware**

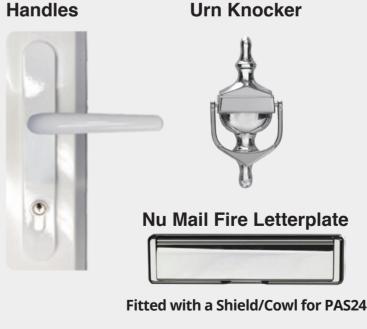

Handles, Knockers and Letterplate available in: White, Black, Gold, Chrome, Satin, Graphite

#### **Bull Ring Knocker**



Gold, Chrome, Graphite



### **Spyhole**



Gold, Chrome only

Chrome only

One tube of "Specialised Sealant" supplied per door



#### THE FIRE DOOR WITH THE SOLID CORE

✓ FD30S Fire Doors

✓ Certified Registered CF705

✓ EN14449:2005-EN1279-5 Compliant Sealed Units

✓ Tested to BS476 Part 22 1987 Both Sides

Report numbers 402105 & 403720

✓ BSEN 1154 Compliant Closers

Solid Core FD30S Door Style	Min Width (mm)	Max Width (mm)	Min Height (mm)	Max Height (mm)	Can Letterbox be fitted?
Clumber/Grill	1011	1014	2119	2126	No
Kelham/Grill	1011	1014	2119	2126	Yes
Wellow 2	733	1014	1931	2126	Yes
Wellow 3	733	1014	1931	2126	Yes
Wellow 4	670	1014	1984	2126	No
Normanton 1	733	1014	1931	2126	Yes
Normanton 2	670	1014	2119	2126	No
Rufford Solid	834	1014	1984	2126	Yes
Carburton Solid	733	1014	1931	2126	Yes
Maple Solid	834	1014	1984	2126	Yes
Abbey Solid	774	1014	1984	2126	Yes
Newstead Solid	874	1004	1984	2126	Yes

Why not consider the other collections available from Time (

